





The IP40 protected flush mounting enclosures are available in sizes from 8 to 72M and are equipped with screw multipolar terminal blocks, 80 A IP 20. They are available with a smoked transparent door (particularly suitable for the commercial and industrial sector) or a blank door (ideal for domestic application); the terminal blocks allow to create simple and neat wiring reducing the set-up time of the enclosure.




|                           |                                            |                       |                                              |
|---------------------------|--------------------------------------------|-----------------------|----------------------------------------------|
| Insulation class          | II (according to IEC 61140 standards)      | Colour                | White RAL 9016                               |
| Outer dim. LxHxD (mm)     | 465x680x95                                 | IP degree             | IP40                                         |
| Installation              | For brick wall                             | Dispersible power (W) | 62                                           |
| Mechanical resistance     | IK08                                       | Rated voltage         | 400 V                                        |
| Door colour               | Blank                                      | Terminal blocks       | 80 A - IP20 bipolar holes with screws        |
| No. of modules EN 50022   | 54 (18x3)                                  | Rated current         | 125 A                                        |
| Glow Wire Test            | 650 °C                                     | Operating temperature | -15 ÷ +60°C                                  |
| Type of material          | Halogen-free in compliance with EN 60754-2 | Electrocod            | 0311                                         |
| Thermo-pressure with ball | 70 °C                                      | Standard              | EN 60670-1 (CEI 23-48) IEC60670-24 CEI 23-49 |
| Insulation voltage        | 750 V                                      | Pole 1 (mm²)          | N/E 2x[(3x16) + (17x10)]                     |
| Pole 2 (mm²)              | N/E 2x[(3x16) + (17x10)]                   |                       |                                              |

## DIMENSIONAL

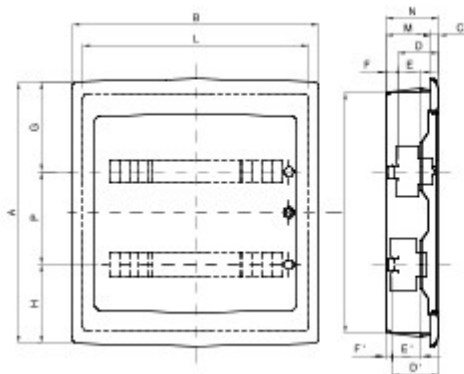

|     |                        | A   | B   | C  | N   | D  | E  | F  | G   | H   | P   | D   | E  | F  | I   | L   | M  |
|-----|------------------------|-----|-----|----|-----|----|----|----|-----|-----|-----|-----|----|----|-----|-----|----|
| 24M | GW 40 606<br>GW 40 886 | 420 | 330 | 16 | 101 | 75 | 48 | 17 | 148 | 122 | 150 | -   | -  | -  | 380 | 290 | 85 |
| 36M | GW 40 609<br>GW 40 889 | 505 | 465 | 16 | 101 | 75 | 48 | 17 | 175 | 155 | 175 | -   | -  | -  | 465 | 427 | 85 |
| 54M | GW 40 610<br>GW 40 890 | 680 | 465 | 25 | 120 | 75 | 48 | 37 | 175 | 155 | 175 | 101 | 74 | 11 | 630 | 415 | 95 |
| 72M | GW 40 611<br>GW 40 891 | 880 | 465 | 25 | 120 | 75 | 48 | 37 | 175 | 155 | 175 | 101 | 74 | 11 | 805 | 415 | 95 |

## TECHNICAL SYMBOLOGY



## STANDARDS/APPROVALS

