


Cable ties, made in PA66, Halogen Free. Available in 13 sizes, from 2.4x75 to 9x914mm. To complete the series are available also:: heavy duty wiring ties, re-openable cable ties, cable ties with eyelet and cable ties with plate.

|                           |                                  |                                           |                                            |
|---------------------------|----------------------------------|-------------------------------------------|--------------------------------------------|
| Colour                    | Colourless                       | Dimensions LxH (mm)                       | 3.6x150                                    |
| Material                  | Polyamide 66                     | Tensile stress (daN)                      | 18                                         |
| Terminal grip capacity Ø  | 3-33 mm                          | Glow Wire Test                            | 650 °C                                     |
| Type                      | Standard                         | Type of material                          | Halogen-free in compliance with EN 60754-2 |
| Electrocod                | 3640                             | Standard                                  | EN 62775                                   |
| Fume corrosiveness        | < 5%                             | Flame resistance in compliance with UL 94 | V2                                         |
| Oxygen limit index        | 27%                              | Installation temperature                  | -5 +60 °C                                  |
| Service temperature range | -40 °C +80 °C (max.peaks 135 °C) |                                           |                                            |

#### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

| Saline solution | Acids              |                    | Bases              |           | Solvents  |           |           |               | Mineral oil | UV rays   |
|-----------------|--------------------|--------------------|--------------------|-----------|-----------|-----------|-----------|---------------|-------------|-----------|
|                 | Concentrated       | Diluted            | Concentrated       | Diluted   | Hexane    | Benzol    | Acetone   | Ethyl alcohol |             |           |
| Resistant       | Limited resistance | Limited resistance | Limited resistance | Resistant | Resistant | Resistant | Resistant | Resistant     | Resistant   | Resistant |

#### DIMENSIONAL

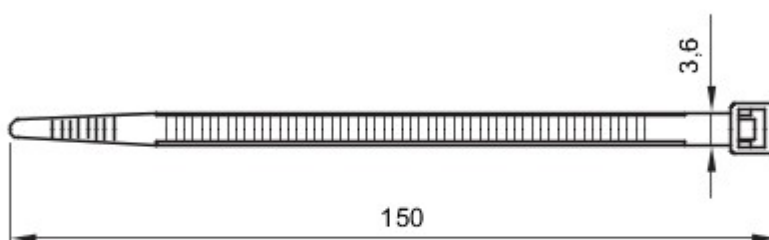

#### TECHNICAL SYMBOLOGY

**GWT**

650 °C

**HF**

Halogen-free in compliance with EN 60754-2



-5 +60 °C

#### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 23/06/2021

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice