




Range of industrial sockets-outlets with rated current equal to 125A in compliance with IEC 60309, with electrical interlock and with MCCB or MCCB equipped with residual current device. The casing of the sockets is made in high performance polyester reinforced with fibre-glass, resistant to UV rays according to EN 62208, impact and abnormal heat and fire. The robustness of the products and their resistance allow the installation in heavy duty environments and with critical atmospheric.

|                             |            |                              |                                                      |
|-----------------------------|------------|------------------------------|------------------------------------------------------|
| Type                        | Vertical   | Thermo-pressure with ball    | 200 °C                                               |
| Impact resistance at -20 °C | 20 J       | IP degree                    | IP66                                                 |
| No. of poles                | 3P+E       | Mechanical resistance        | IK10                                                 |
| Frequency                   | 50/60 Hz   | Terminal tightening capacity | 2,5-50 mm² flexible cables - 2,5-70 mm² rigid cables |
| Operating temperature       | -25 +40 °C | Protection                   | MCB+ADD-ON RCD                                       |
| Electrocod                  | 2221       | Glow wire test               | 850 °C (Socket) - 960 °C (Case)                      |
| Colour                      | Yellow     | Circuit breaker              | 125A 25 kA C characteristic 30-3000 mA               |
| Rated current (A)           | 125        | Reference h                  | 4                                                    |
| Rated voltage               | 100-130 V  | Type of use                  | Heavy duty                                           |

### DIMENSIONAL

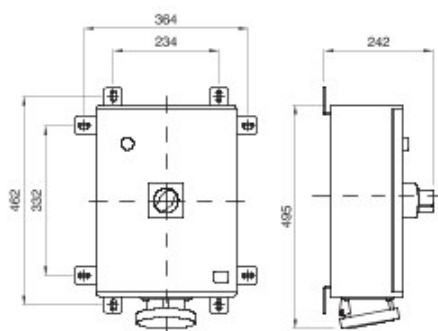

### TECHNICAL SYMBOLOGY



200 °C

IP

IP66

IK

IK10

### INSTALLATION



GWT

850 °C (Socket) - 960 °C (Case)

### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 21/06/2021

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice